




LAR1 Aluminum Ribbon Tweeter


Impedance: 6ohms
Rated Power: 60W
Sensitivity: 95dB/W/m
Frequency range: 1400Hz-30kHz
Dimension of ribbon(mm): 8.5W×130H×0.015T
Shape of ribbon: Non-corrugated honeycomb
Mass of ribbon: 34mg
Moving area of aluminum ribbon: 1105 square millimeter
Gap flux: 0.58Tesla
Recommended crossover frequency: 2200Hz
Material of faceplate: aluminum
Dimension of faceplate(mm): 80W×168H×4T
Outside dimension(mm): 80W×168H×76D
Net weight: 1.6kg/pc




Frequency response

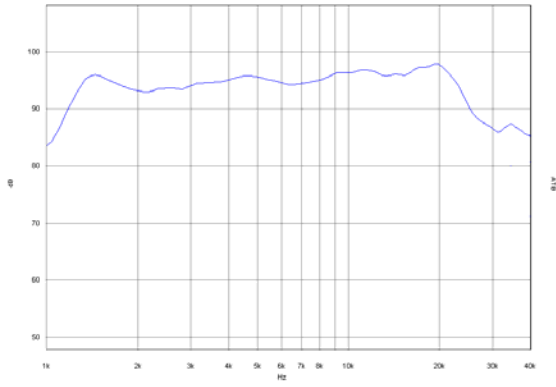


Impedance

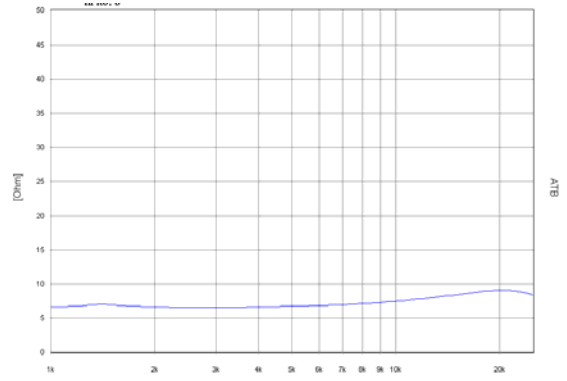

Distortion

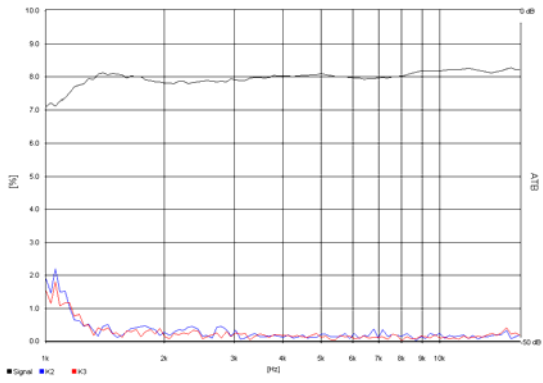

Impulse

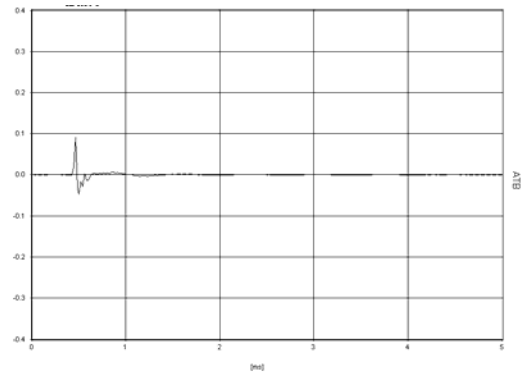

Waterfall

