


### NeoCD3.0 Ribbon tweeter

- strong Neodymium magnet
  - 3 inch enforced sandwich diaphragm
- build in impedance convertor
  - low distortion, fast transition



Parameter	
Sensitivity	93dB/1M/2.83v
Power handling	17W nominal, 40W max
Frequency range	1,400-40,000Hz
Nominal Impedance	7 ohm
DCR	0.02 ohm
Ribbon dimension	6x60x0.015mm
Effective ribbon area	480 square millimeter
Ribbon weight	18 milligram
Gap flux	0.6 Tesla average
Gap height	3 millimeter
Recommend cut frequency	2.500Hz with 3-order
Net weight	650 gram

### SPL vs Freq

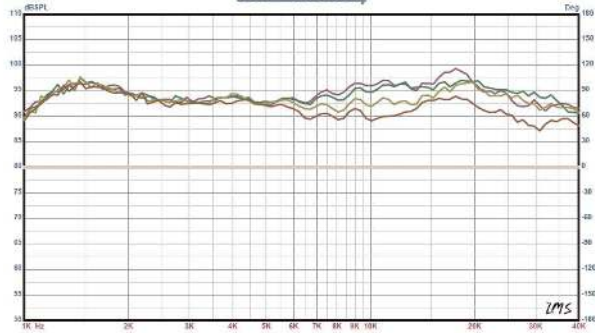

horizontal diffusion: on-axis, 15 degree, 30 degree, 45 degree

