
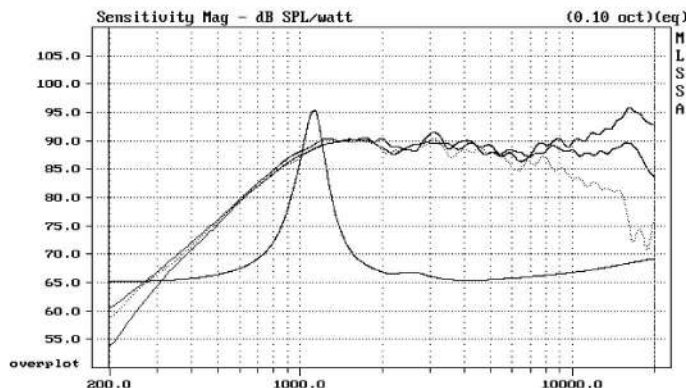


Good efficiency and extended frequency response  
Catenary profile impregnated textile dome  
Solid aluminium face plate

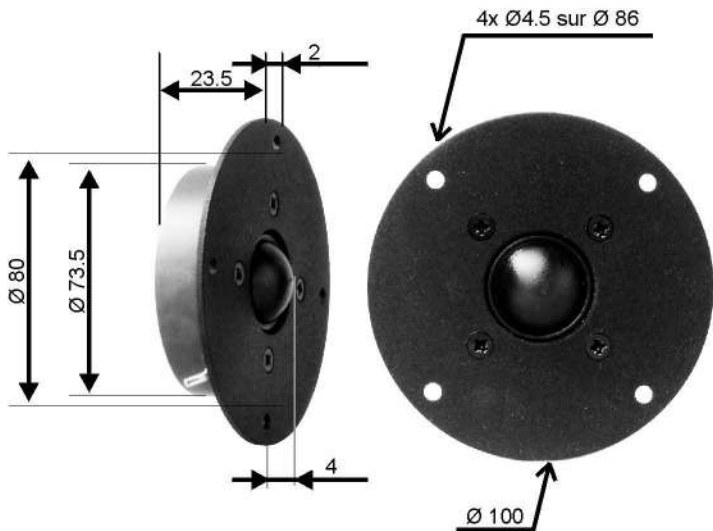

Nominal impedance... 8 ohms  
Resonance... 900 Hz  
Power handling (IEC) ... 55 W  
Sensitivity (2.83V/1m) ... 90.0 dB

Voice coil diam. .... 25 mm  
Voice coil length..... 1.6 mm  
Former ..... aluminium  
Layer(s) ..... 2

Resistance (DC)..... 5.8 ohms  
Inductance ..... 0.011 mH  
Xmax..... ± 0.30 mm

Cone material... coated textile  
Chassis ..... aluminium  
Total mass..... 460 gr

Replaceable voice coil assembly (RW025A0)

